

**DESCRIPTION**

Dutair blowers for pressure and vacuum are compact machines consisting of an electric motor with a built-on pump housing. The rotational speed of the impeller creates a high compression of the internal air, resulting in a vacuum at the inlet and pressure at the outlet of the blower. This process works without any contact, thus eliminating wear and the need for lubrication.

**FEATURES**

- compressor and vacuum pump in a single unit
- robust
- oil-free
- low noise levels
- low vibration levels
- maintenance free
- vertical mounting with in- / outlet pointing upwards possible
- integrated silencers
- many different applications

**DBP607****BENEFITS**

- high motor efficiency and excellent power factor yield lower electrical consumption
- accurate performance curves in a frequency range of 30 to 80 Hz make Dutair blowers suitable for applications with a wide operating area
- detailed sound level data for acoustic purposes
- Dutair blower motors are fitted with PTC thermistors as standard
- a variety of modifications possible for non-standard applications

**GENERAL TECHNICAL DATA**

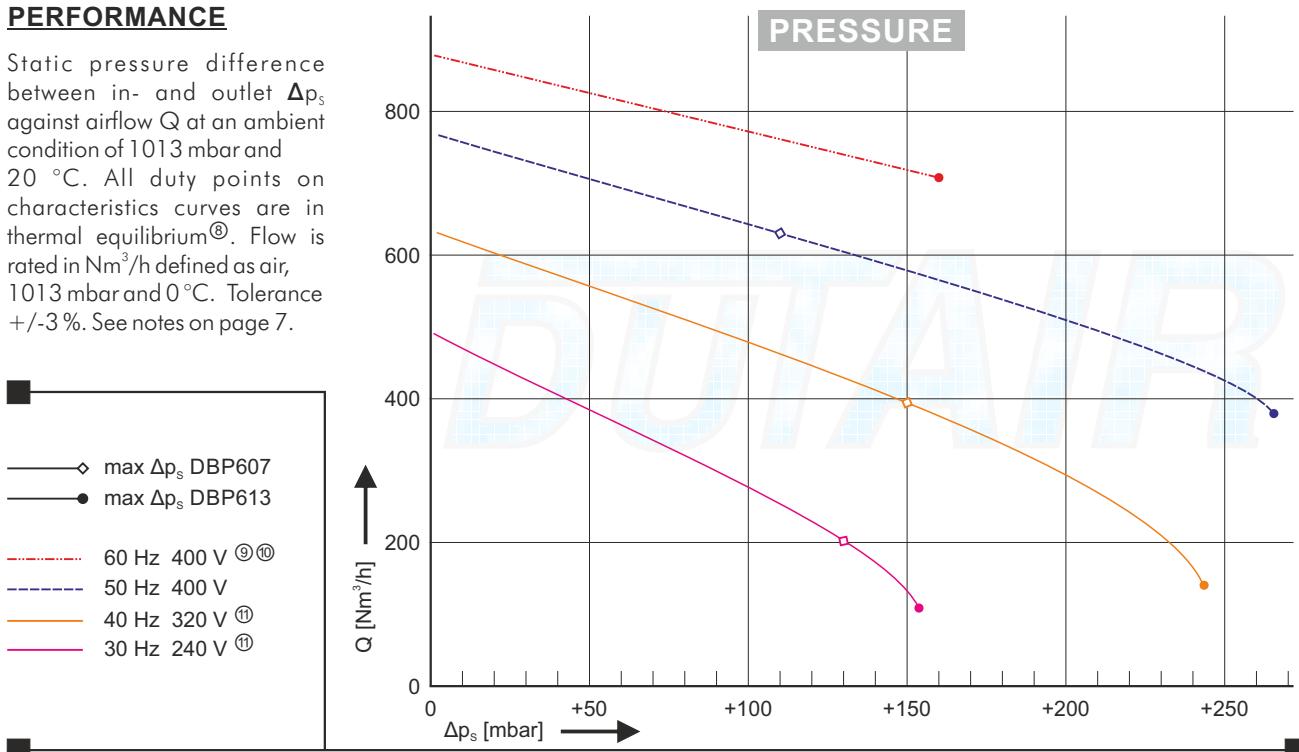
		<b>DBP607</b>		<b>DBP613</b>	
		50 Hz	60 Hz	50 Hz	60 Hz
Power <sup>①</sup>	kW	7.5	-	13	15
Voltage Δ / Y <sup>②</sup>	V	400/690	-	400/690	460/795
Current Δ / Y	A	14.0/8.1	-	23.4/13.5	22.4/12.9
Revolutions	/min	2925	-	2920	3525
Protection class <sup>③</sup>		IP55	-	IP55	IP55
PTC Thermistors <sup>④</sup>	°C	150	-	150	150
Efficiency class <sup>⑤</sup>		IE3	-	IE3	IE3
Efficiency <sup>⑥</sup>	%	91.0	-	91.9	92.0
Power factor	%	89.5	-	91.7	91.3
Sound pressure <sup>⑦</sup>	dB(A)	74.3	-	78.8	83.9
Weight	kg	104	-	131	131

<sup>①</sup>see notes on page 7

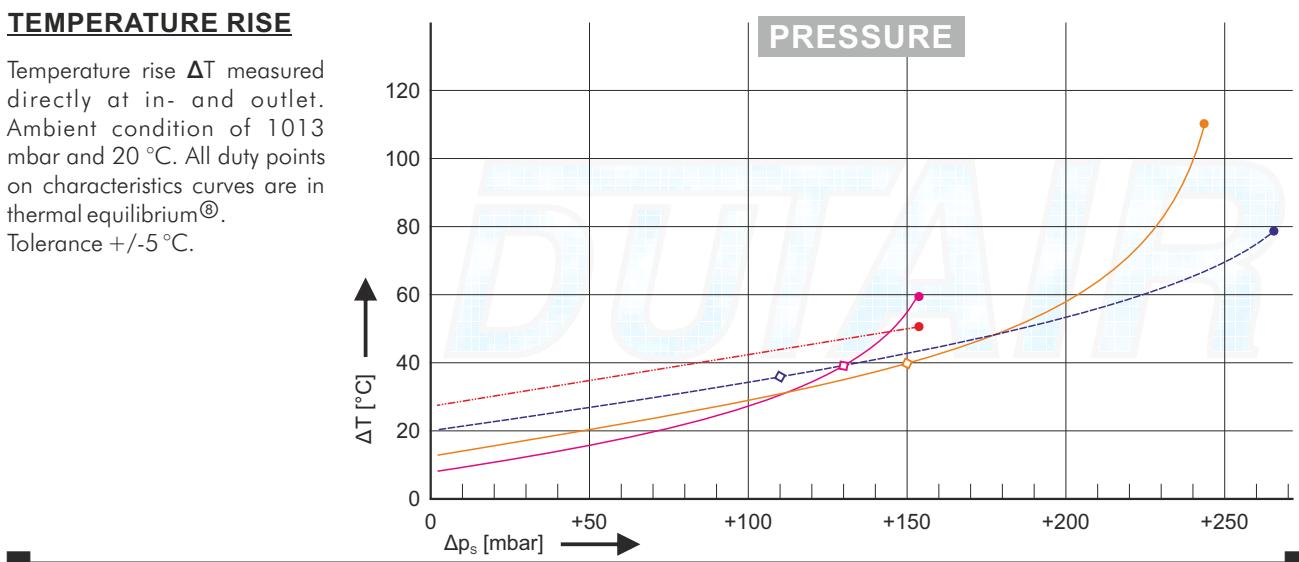
## DBP607/613

**PERFORMANCE**

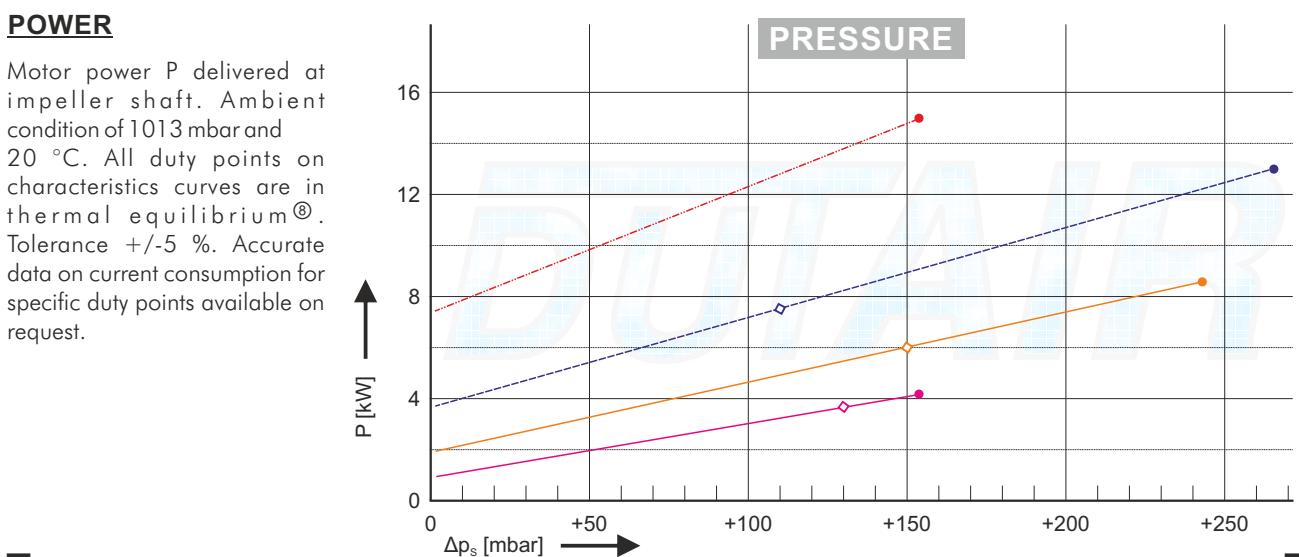
Static pressure difference between in- and outlet  $\Delta p_s$  against airflow Q at an ambient condition of 1013 mbar and 20 °C. All duty points on characteristics curves are in thermal equilibrium<sup>®</sup>. Flow is rated in Nm<sup>3</sup>/h defined as air, 1013 mbar and 0 °C. Tolerance +/- 3 %. See notes on page 7.

**TEMPERATURE RISE**

Temperature rise  $\Delta T$  measured directly at in- and outlet. Ambient condition of 1013 mbar and 20 °C. All duty points on characteristics curves are in thermal equilibrium<sup>®</sup>. Tolerance +/- 5 °C.

**POWER**

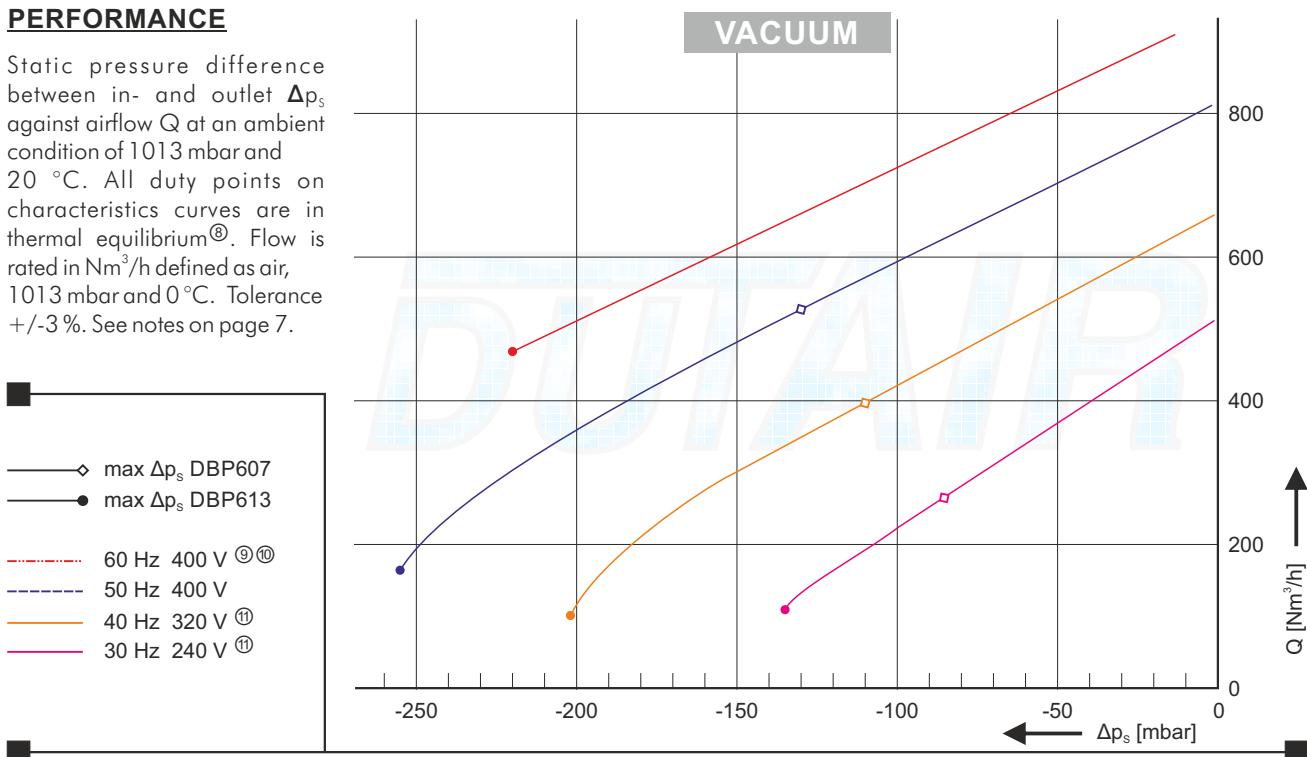
Motor power P delivered at impeller shaft. Ambient condition of 1013 mbar and 20 °C. All duty points on characteristics curves are in thermal equilibrium<sup>®</sup>. Tolerance +/- 5 %. Accurate data on current consumption for specific duty points available on request.



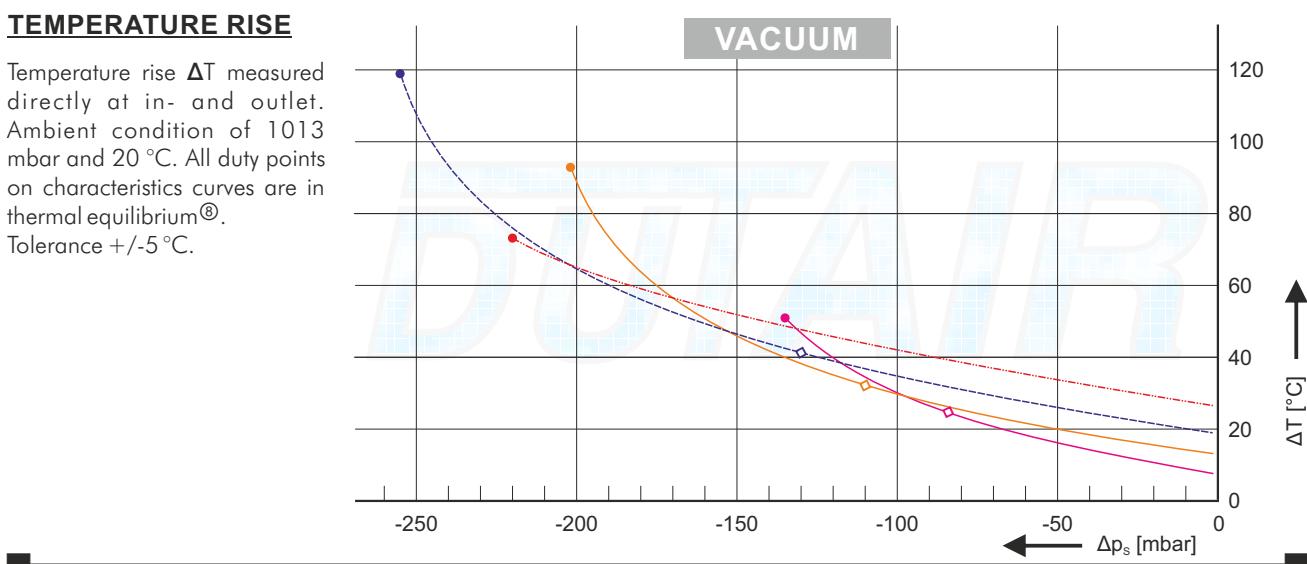
## DBP607/613

**PERFORMANCE**

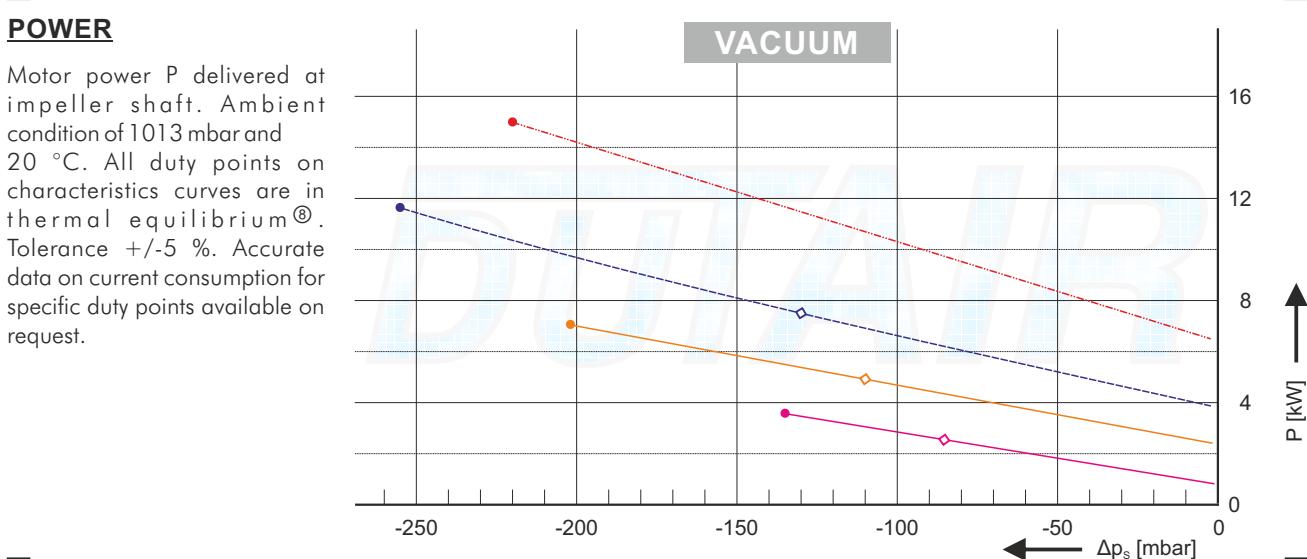
Static pressure difference between in- and outlet  $\Delta p_s$  against airflow Q at an ambient condition of 1013 mbar and 20 °C. All duty points on characteristics curves are in thermal equilibrium®. Flow is rated in Nm³/h defined as air, 1013 mbar and 0 °C. Tolerance +/- 3 %. See notes on page 7.

**TEMPERATURE RISE**

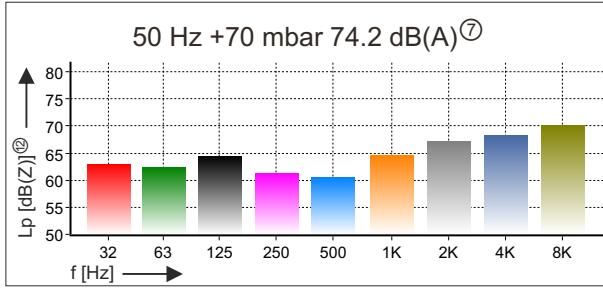
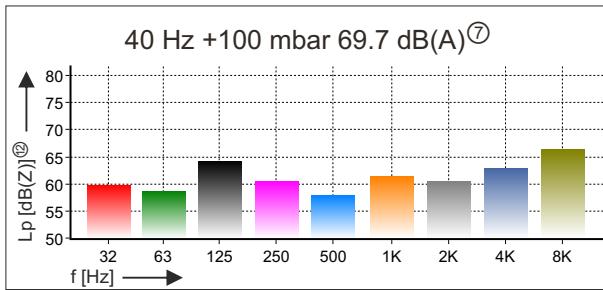
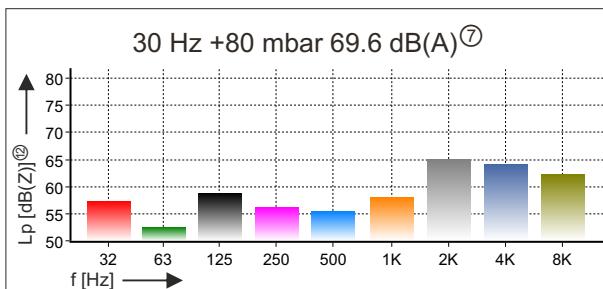
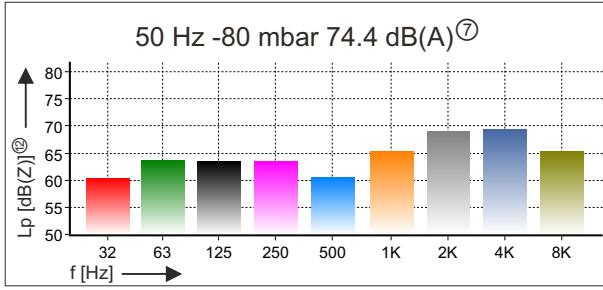
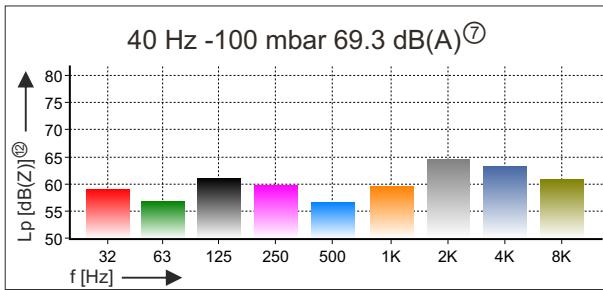
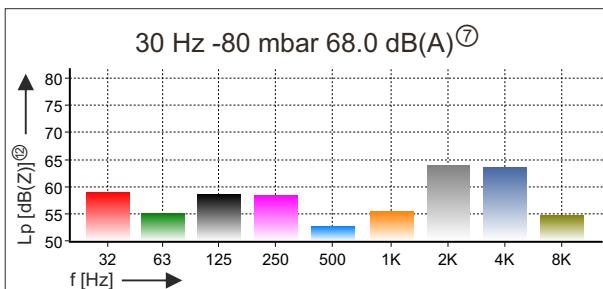
Temperature rise  $\Delta T$  measured directly at in- and outlet. Ambient condition of 1013 mbar and 20 °C. All duty points on characteristics curves are in thermal equilibrium®. Tolerance +/- 5 °C.

**POWER**

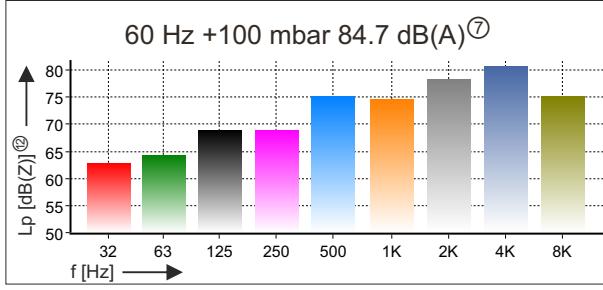
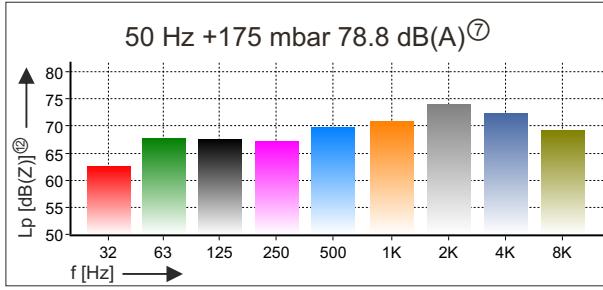
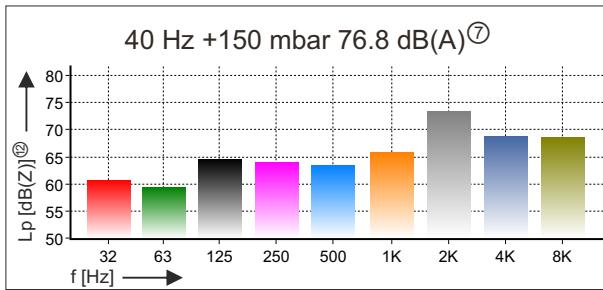
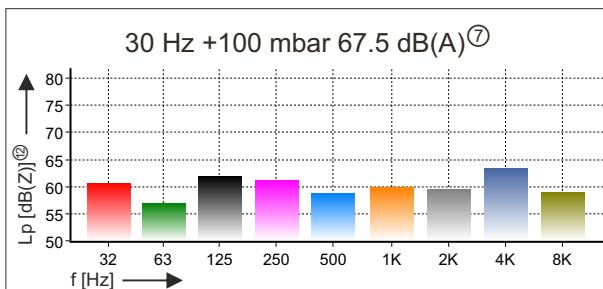
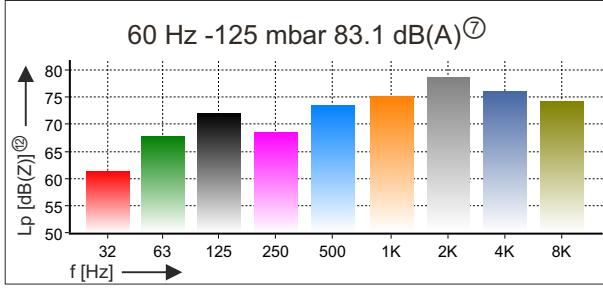
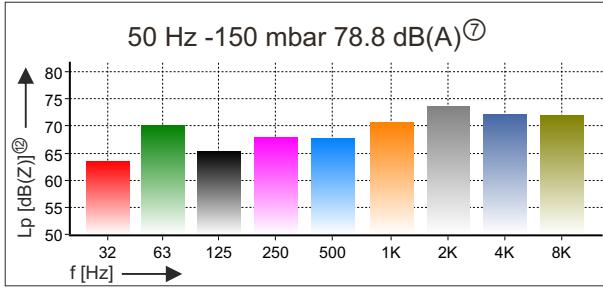
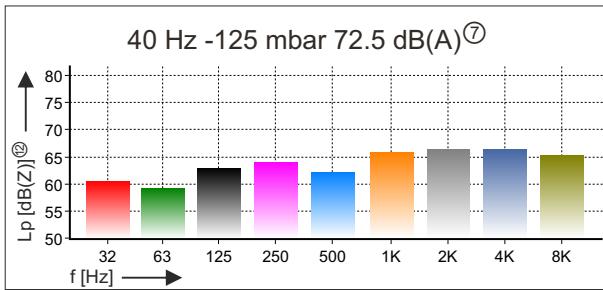
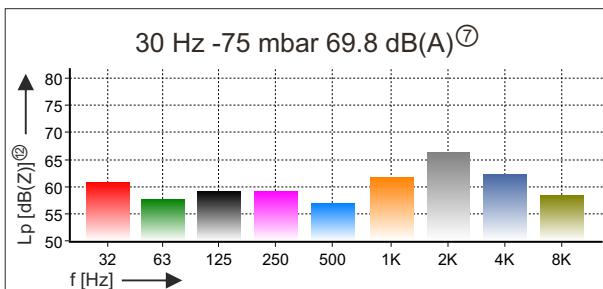
Motor power P delivered at impeller shaft. Ambient condition of 1013 mbar and 20 °C. All duty points on characteristics curves are in thermal equilibrium®. Tolerance +/- 5 %. Accurate data on current consumption for specific duty points available on request.



## DBP607/613

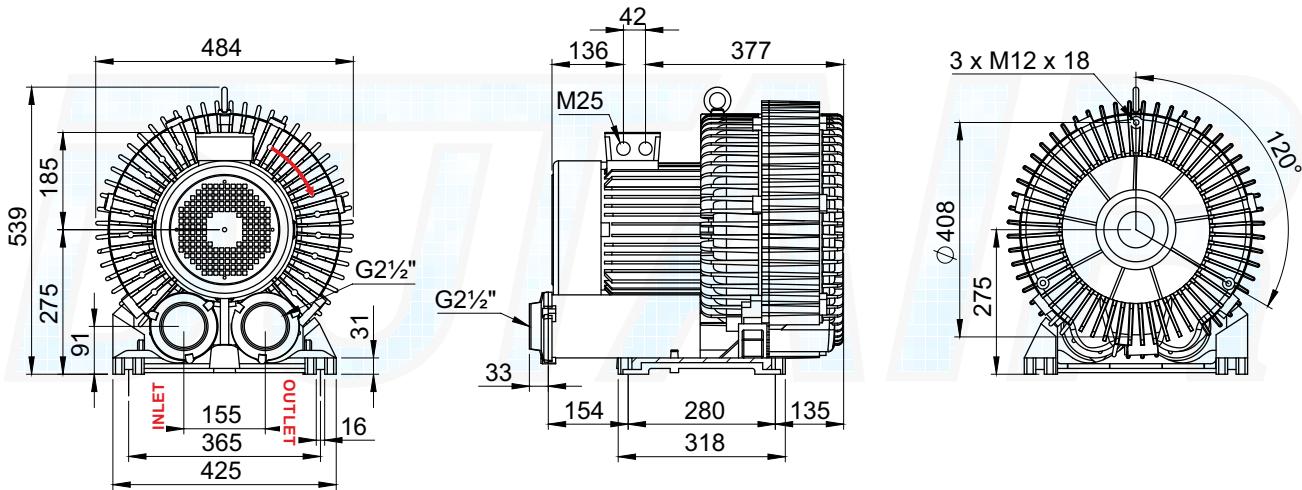
SOUND LEVEL PRESSURE DBP607SOUND LEVEL VACUUM DBP607

## DBP607/613

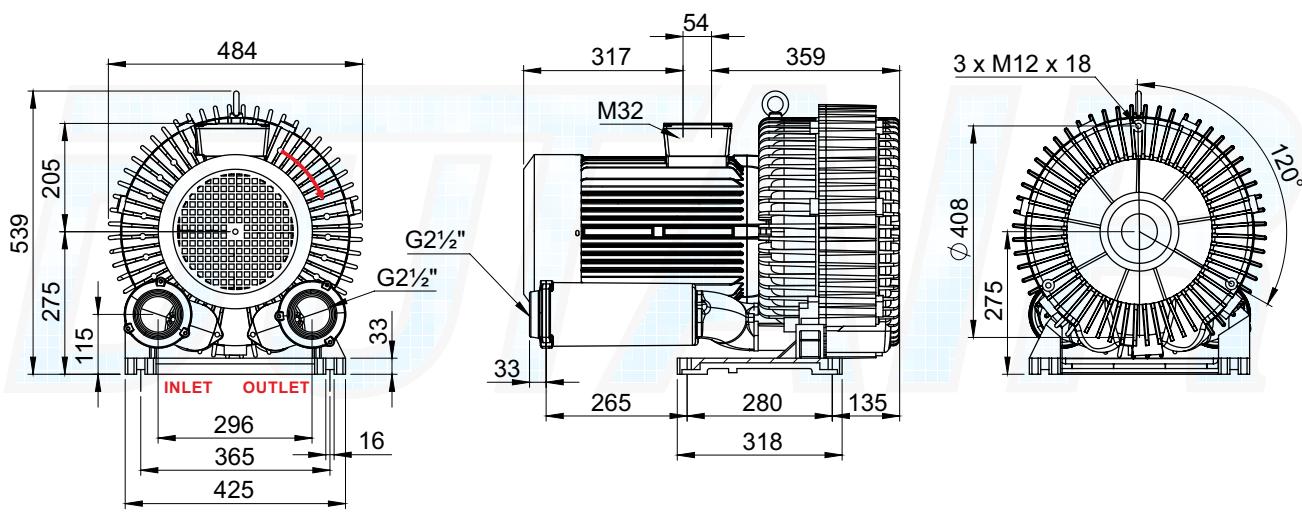
SOUND LEVEL PRESSURE DBP613SOUND LEVEL VACUUM DBP613

## DBP607/613

## DIMENSIONS DBP607



## DIMENSIONS DBP613



- all dimensions in mm except in- and outlet connection
- CAD models available in STEP format
- tolerance +/- 2 mm
- in case of discrepancy between dimensional drawing and CAD model, dimensions in dimensional drawing take precedence

ORDERING INFORMATION

53	DB	S	5	75	U...-..	HT	RS	IP56	Q	G	Ex	C....
		S: Double stage serial blower P: Double stage parallel blower			Optional special motor voltage e.g. U500-50: 500 V at 50 Hz version	Optional bearing lubrication <sup>(4)</sup> HT: high temp. / LT: low temp.	Optional bearing material ss: stainless steel	Optional seal on motor shaft FE: PTFE seal / Vt: Viton seal	Optional Q: anti condensation heating 230 V	Optional G: blower in gas-tight version available for single stage blowers	Optional ATEX non-sparking version ATEX Ex II Cat 3G/3D Ex-na	Optional painting, standard RAL7023 e.g. C7035: RAL7035

COMMENTS

**WARNING:** Comparing performance data can be misleading. Dutair specifications are based on a thermal equilibrium<sup>(5)</sup> for all duty points along the characteristics curves in this document. Many commercial based flow characteristics curves defined as m<sup>3</sup>/h air at 20 °C, 1013 mbar(a) and +/-10 % tolerance but can be up to 40 % higher than accurate characteristics curves defined as Nm<sup>3</sup>/h air at 0 °C, 1013 mbar(a), thermal equilibrium<sup>(5)</sup> duty points and +/-3 % tolerance as specified in this Dutair document.

The performance measurements are executed with instruments calibrated by DNV KEMA and are traceable to primary and/or internationally accepted measurement standards.

- ① Maximum shaft power allowed at continuous operation.  
Rated output electric motor in accordance with NEN-EN-IEC 60034-1.
- ② Rated voltage for three phase triangle and star connection. Allowed supply voltage tolerance 5 %.  
Consult your Dutair dealer for different supply voltages.
- ③ Protection class in accordance with NEN-EN-IEC 60034-5.
- ④ 3 pieces PTC thermistors connected in series fitted in each motor phase.
- ⑤ Efficiency classification in accordance with NEN-EN-IEC 60034-30.
- ⑥ Efficiency rated at 100% motor load.
- ⑦ Free field equivalent continuous sound pressure level A-weighted L<sub>eq</sub>[dB(A)].  
Unless specified L<sub>eq</sub>[dB(A)] rated at 50 % of maximum pressure at 50 Hz. Tolerance +/- 2 dB(A).  
Conditions as note ⑬.
- ⑧ Thermal equilibrium is the state reached when the temperature rise of several parts of the machine as well as the temperature rise between in- and outlet do not vary by more than a gradient of 2 °C per hour.
- ⑨ Operation at 400 V at 60 Hz: 110 % of rated current at 50 Hz is allowed for 60 Hz power rating.
- ⑩ Characteristics for DBP613 only.
- ⑪ Maximum performance at 30 & 40 Hz is limited by temperature rise as well as current. At 30 Hz 60 % and at 40 Hz 80 % of nominal motor current.
- ⑫ Free field class 1 octave band measurements in accordance with IEC 61260 unweighted L<sub>p</sub>[dB(Z)].  
Tolerance +/- 5 dB(Z). Conditions as note ⑬.
- ⑬ Measurements at 1 m distance with in- and outlet duct connected to the blower on a reflective surface.  
Class 1 sound level meter Delta Ohm HD2010UC/A according to IEC 61672-1.  
Acoustic calibration prior to measurements with class 1 calibrator HD2020ACC according to IEC 60942.
- ⑭ Standard ambient temperature range -20...+40°C.